

# Experimental Investigation of Two Stroke Copper Coated Spark Ignition Engine with Gasoline and Gasohol

S. Narasimha Kumar

**Abstract-** The concept of catalytic combustion in spark ignition engines has been tried by various researches which offers improved thermal efficiency and reduced exhaust emissions due to oxidation of fuels with aid of catalyst. The piston top and cylinder head are coated with catalytic materials such as copper, chromium and nickel using flame spray gun. The performance, emission and combustion characteristics of the engine coated with catalytic materials are studied and are compared with the standard engine. In the present paper experimental investigations were conducted to evaluate the performance and control the exhaust emissions from two-stroke, single cylinder, spark ignition (SI) engine, with alcohol blended gasoline (80% gasoline and 20% ethanol by volume) having copper coated combustion chamber [CCCC, copper-(thickness, 300  $\mu$ ) coated on piston crown, inner side of cylinder head] provided with catalytic converter with sponge iron as catalyst and compared with conventional SI engine (CE) with pure gasoline operation. Performance parameters (brake thermal efficiency, exhaust gas temperature and volumetric efficiency) and exhaust emissions (carbon monoxide (CO) and un-burnt hydrocarbons (UBHC)) were determined with different values of brake mean effective pressure of the engine. A microprocessor-based analyzer was used for the measurement of CO/UBHC in the exhaust of the engine. Copper coated combustion chamber with alcohol blended gasoline considerably improved the performance and reduced pollutants in comparison with CE with pure gasoline operation. Catalytic converter with air injection significantly reduced pollutants with test fuels on both configurations of the combustion chamber. The catalyst, sponge reduced the pollutants effectively with both test fuels in both versions of the combustion chamber.

**Keywords:** S.I. Engine, CE, copper coated combustion chamber, Performance, Exhaust Emissions, CO, UBHC, Catalytic converter, Sponge iron, Air injection.

## I. INTRODUCTION

The paper is divided into i) Introduction, ii) Materials and Methods, iii) Results and Discussions, iv) Conclusions, Research Findings, Future scope of work followed by References. This section deals with need for alternate fuels, important substitutes for gasoline, emissions from SI engine, their formation, effect of pollutants on human health, their impact on environment, change of fuel composition and engine modification to reduce pollutants and improve the performance, methods of reducing pollutants, catalytic converter, research gaps, objective of the experimentation. The civilization of a particular country has come to be measured on the basis of the number of automotive vehicles being used by the public of the country.

**Manuscript received March 15, 2014.**

S. Narasimha Kumar, Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology, Gandipet, Hyderabad, India.

The tremendous rate at which population explosion is taking place imposes expansion of the cities to larger areas and common man is forced, these days to travel long distances even for their routine works. This in turn is causing an increase in vehicle population at an alarm rate thus bringing in pressure in Government to spend huge foreign currency for importing crude petroleum to meet the fuel needs of the automotive vehicles. The large amount of pollutants emitting out from the exhaust of the automotive vehicles run on fossil fuels is also increasing as this is proportional to number of vehicles. In view of heavy consumption of petrol due to individual transport, and fast depletion of fossil fuels, the search for alternate fuels has become pertinent apart from effective fuel utilization which has been the concern of the engine manufacturers, users and researchers involved in combustion & alternate fuel research.

In the context of fast depletion of fossil fuels, the search for alternate fuels has become pertinent. Alcohols are probable candidates as alternate fuels for SI engines, as their properties are compatible close to gasoline fuels. If alcohols are blended in small quantities with gasoline fuels, no engine modification is necessary.

Carbon monoxide (CO) and un-burnt hydrocarbons (UBHC), major exhaust pollutants formed due to incomplete combustion of fuel, cause many human health disorders [1-2]. These pollutants cause asthma, bronchitis, emphysema, slowing down of reflexes, vomiting sensation, dizziness, drowsiness, etc. Such pollutants also cause detrimental effects [3] on animal and plant life, besides environmental disorders. Age and maintenance of the vehicle are some of the reasons [4-6] for the formation of pollutants.

Engine modification [7-9] with copper coating on piston crown and inner side of cylinder head improves engine performance as copper is a good conductor of heat and combustion is improved with copper coating. The use of catalysts to promote combustion is an old concept. More recently copper is coated over piston crown and inside of cylinder head wall and it is reported that the catalyst improved the fuel economy and increased combustion stabilization.

Catalytic converter is one of the effective [10-14] methods to reduce pollutants in SI engine. Reduction of pollutants depended on mass of the catalyst, void ratio, temperature of the catalyst, amount of air injected in the catalytic chamber. A reduction of 40% was reported with use of sponge iron catalyst while with air injection in the catalytic chamber reduced pollutants by 60%.

Alcohol was blended [14-16] with gasoline to reduce pollutants and improve the performance. CO and UBHC emissions reduced with blends of alcohol with gasoline.


The present paper reported the performance evaluation of copper coated combustion chamber with alcohol blended gasoline (gasoline-80% and ethanol-20% by volume) and compared with pure gasoline operation on CE. Exhaust emissions of CO and UBHC were controlled by catalytic converter with sponge iron as catalyst.

II. MATERIALS AND METHODS

This section deals with fabrication of copper coated combustion chamber, description of experimental set up, operating conditions of catalytic converter and definition of used values

In catalytic coated combustion chamber, crown of the piston and inner surface of cylinder head are coated with copper by flame spray gun. The surface of the components to be coated are cleaned and subjected to sand blasting. A bond coating of nickel- cobalt- chromium of thickness 100 microns is sprayed over which copper (89.5%), aluminium (9.5%) and iron (1%) alloy of thickness 300 microns is coated with METCO flame spray gun. The coating has very high bond strength and does not wear off even after 50 h of operation [7].

Figure.1. shows experimental set-up used for investigations. A two- stroke, single-cylinder, air -cooled, SI engine (brake power 2.2 kW at a speed of 3000 rpm) was coupled to a Swing brake dynamometer for measuring its brake power. Speed was measured with speed sensor and torque with torque sensor. Compression ratio of engine is 7.5:1. Exhaust gas temperature, speed, torque, fuel consumption and air flow rate of the engine were measured with electronic sensors. The diameter and stroke of the cylinder were 57 mm each. Recommended spark ignition timing was 25°aTDC. CO and UBHC emissions in engine exhaust were measured with Netel Chromatograph analyzer.

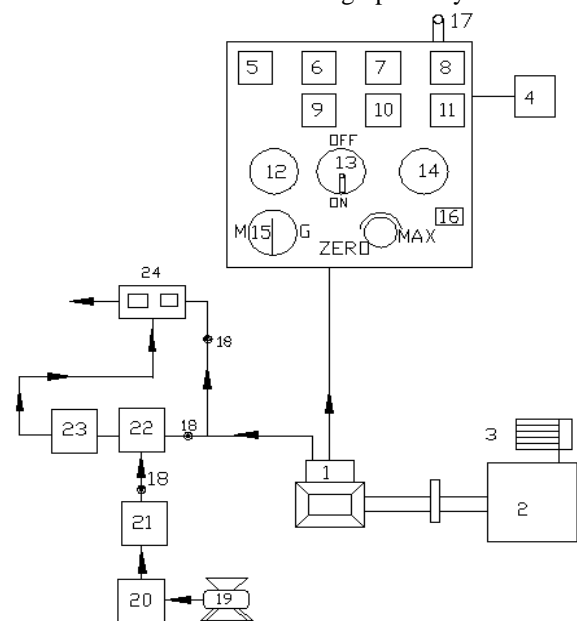


1. Engine, 2. Electrical swinging field dynamometer, 3. Loading arrangement, 4. Fuel tank, 5. Torque indicator/controller sensor, 6. Fuel rate indicator sensor, 7. Hot wire gas flow indicator, 8. Multi channel temperature indicator, 9. Speed indicator, 10. Air flow indicator, 11. Exhaust gas temperature indicator, 12. Mains ON, 13. Engine ON/OFF switch, 14. Mains OFF, 15. Motor/Generator option switch, 16. Heater controller, 17. Speed indicator, 18. Directional valve, 19. Air compressor,

20. Rotometer, 21. Heater, 22. Air chamber, 23. Catalytic chamber, 24. CO/HC analyzer,

Fig.1 Schematic Diagram of Experimental set up

A catalytic converter [11] (Figure.2) was fitted to exhaust pipe of engine. Provision was also made to inject a definite quantity of air into catalytic converter. Air quantity drawn from compressor and injected into converter was kept constant so that backpressure do not increase. Experiments were carried out on CE and copper coated combustion chamber with different test fuels [pure gasoline and alcohol blended gasoline (20% by vol)] under different operating conditions of catalytic converter like set-A, without catalytic converter and without air injection; set-B, with catalytic converter and without air injection; and set-C, with catalytic converter and with air injection.

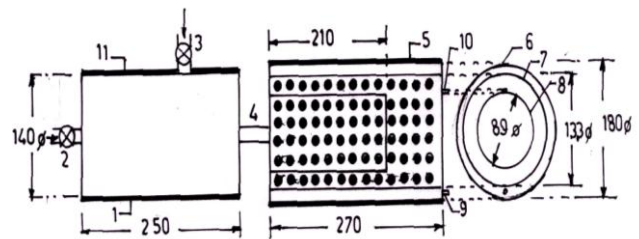

Note: All dimensions are in mm.

1. Air chamber, 2. Inlet for air chamber from the engine, 3. Inlet for air chamber from compressor, 4. Outlet for air chamber, 5. Catalyst chamber, 6. Outer cylinder, 7. Intermediate cylinder, 8. Inner cylinder, 9. Outlet for exhaust gases, 10. Provision to deposit the catalyst and 11. Insulation

Fig.2. Details of Catalytic converter

Definitions of used values:

Brake mean effective pressure: It is defined as specific torque of the engine. Its unit is bar.

$$BP = \frac{BMEP \times 10^5 \times L \times A \times n \times k}{60000}$$

BP = Brake power of the engine in kW;

BMEP= Brake mean effective pressure of the engine in bar

L= Stroke of the piston in m

A= Area of the piston =  $\frac{3.14 \times D^2}{4}$ , Where D= Bore of the

cylinder in m

n= Effective number of power cycles =  $\frac{N}{2}$ , where N=Speed

of the engine = 3000 rpm

Brake thermal efficiency (BTE); It is the ratio of brake power of the engine to the energy supplied to the engine. Brake power was measured with dynamometer. Energy supplied to the engine is the product of rate of fuel consumed ( $m_f$ ) and calorific value ( $c_v$ ) of the fuel. Higher the efficiency better the performance of the engine is.

$$BTE = \frac{BP}{m_f \times c_v}$$

Brake specific energy consumption (BSEC): It is measured at full load operation of the engine. Lesser the value, the better the performance of the engine. It is defined as energy consumed by the engine in producing 1 kW brake power. When different fuels having different properties are tested in engine, brake specific fuel consumption is not the criteria to evaluate the performance of the engine. Peak BTE and BSEC at full load are important



parameters to be considered to evaluate the performance of the engine.

Brake mean effective pressure: It is defined as specific torque of the engine. Its unit is bar.

$$BP = \frac{BMEP \times 10^5 \times L \times A \times n \times k}{60000}$$

BP = Brake power of the engine in kW;

BMEP= Brake mean effective pressure of the engine in bar

L= Stroke of the piston in m

A= Area of the piston =  $\frac{3.14 \times D^2}{4}$ , Where D= Bore of the

cylinder in m

n= Effective number of power cycles =  $\frac{N}{2}$ , where N=Speed

of the engine = 3000 rpm

$$BSEC = \frac{1}{BTE}$$

Volumetric efficiency: It is the ratio of the volume of air drawn into a cylinder to the piston displacement.

Calculation of actual discharge of air: By means of water tube manometer and an orifice flow meter, head of air ( $h_a$ ) can be calculated. Velocity of air ( $V_a$ ) can be calculated using the formula  $V_a = \sqrt{2gh_a}$ ; Actual discharge of air


=  $c_d a \sqrt{2gh_a}$ , where a= area of an orifice flow meter,  $c_d$  = Coefficient of discharge.

### III. RESULTS AND DISCUSSION

This section deals with determination of performance parameters and exhaust emissions,

#### 3.1 Performance Parameters

This section deals with i) variation of brake thermal efficiency, exhaust gas temperature, volumetric efficiency with brake mean effective pressure with test fuels with different versions of the combustion chamber, and ii) variation of brake specific energy consumption at full load operation with test fuels with various combustion chambers. Figure.3 shows the variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in different versions of the combustion chamber with test fuels of pure gasoline and alcohol blended gasoline at a compression ratio of 7.5:1 and speed of 3000 rpm. BTE increased up to 80% of the full load operation with an increase of BMEP in different versions of the combustion chamber, with different test fuels. Beyond 80% of the full load operation, BTE decreased with test fuels due to reduction of volumetric efficiency and air fuel ratio. Similar trends were observed by Murali Krishna [10]. Higher value of BTE was observed with alcohol blended gasoline over pure gasoline at all loads due to lower Stoichiometric air requirement of alcohol blended gasoline over pure gasoline operation.

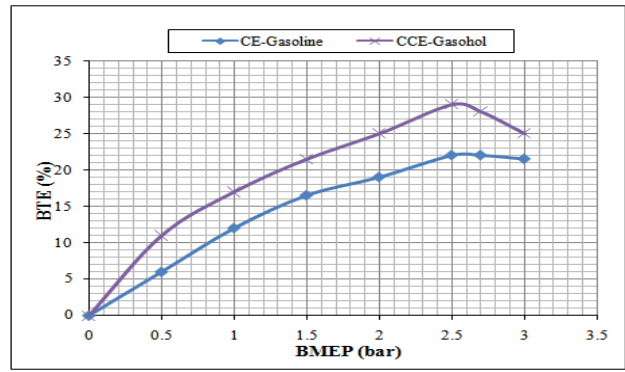


CE- conventional engine: CCCC-Copper coated combustion chamber. BTE- brake thermal efficiency  
BMEP-Brake mean effective pressure

**Figure.3. Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in different versions of the combustion chamber with test fuels at a compression ratio of 7.5:1 and speed of 3000 rpm**

Copper coated combustion chamber showed higher thermal efficiency when compared to CE with both test fuels at all loads, particularly at near full load operation, due to efficient combustion with catalytic activity, which was more pronounced at peak load, as catalytic activity increases with prevailing high temperatures at full load.

Figure.4 presents bar charts showing the variation of brake specific energy consumption (BSEC) at full load operation with different versions of the combustion chamber with test fuels. Copper coated combustion chamber showed lower BSEC in comparison with CE with test fuels. This was due to improved combustion with increased catalytic activity with test fuels. Alcohol blended gasoline showed lower value of BSEC in comparison with pure gasoline operation on both versions of the combustion chamber. This was due to lower theoretical air fuel ratio requirement of alcohol blended gasoline so as to improve combustion with improved air fuel ratios.

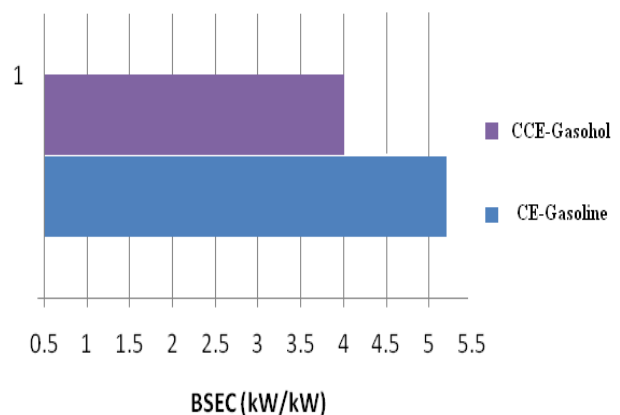


**Figure.4 presents bar charts showing the variation of brake specific energy consumption (BSEC) at full load operation with different versions of the combustion chamber with test fuels**

Figure.5 shows the variation of exhaust gas temperature (EGT) with BMEP in different versions of the combustion chamber with test fuels at a speed of 3000 rpm and compression ratio of 7.5:1, which indicated that EGT increased with an increase of




BMEP. This was due to increase of fuel consumption with load. The value of EGT was lower with alcohol blended gasoline when compared to pure gasoline at all loads in CE and copper coated combustion chamber, because, with alcohol blended gasoline, work transfer from piston to gases in cylinder at the end of compression stroke was too large, leading to reduction in the value of EGT. This was also due to high latent heat of evaporation of alcohol blended gasoline. Copper coated combustion chamber registered lower value of EGT when compared to CE for both test fuels, which confirmed that efficient combustion with the copper coated combustion chamber in comparison with CE.

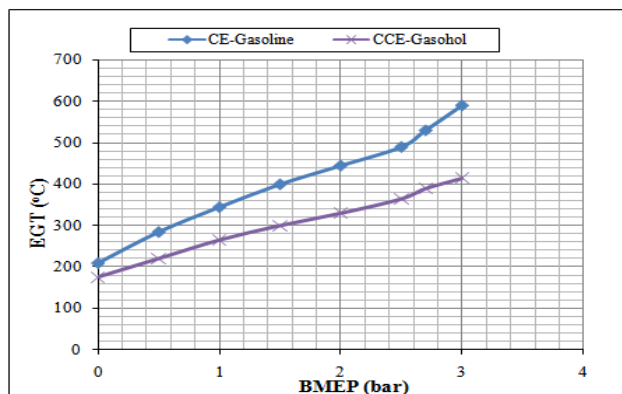

CE- conventional engine: CCCC-Copper coated combustion chamber. BTE- brake thermal efficiency  
BMEP-Brake mean effective pressure

**Figure.5. Variation of exhaust gas temperature (EGT) with brake mean effective pressure (BMEP) in different versions of the combustion chamber with test fuels at a compression ratio of 7.5:1 and speed of 3000 rpm**

Figure. 6 shows the variation of volumetric efficiency (VE) with BMEP with test fuels at a speed of 3000 rpm and a compression ratio of 7.5:1, which indicated that VE decreased with increase of BMEP due to increase of gas temperature [10]. Copper coated combustion chamber showed marginally higher volumetric efficiency at all loads in comparison with CE with different test fuels, due to reduction of residual charge and deposits in the combustion chamber of CCE when compared to CE, which shows the same trend as reported earlier[14]. This was also because of lower value of exhaust gas temperatures as volumetric efficiency depends of temperature of combustion chamber walls. Volumetric efficiency increased marginally with alcohol blended gasoline when compared with pure gasoline operation with both versions of the combustion chamber at all loads, due reduction of temperature of air because of high latent heat of evaporation of alcohol blended gasoline.

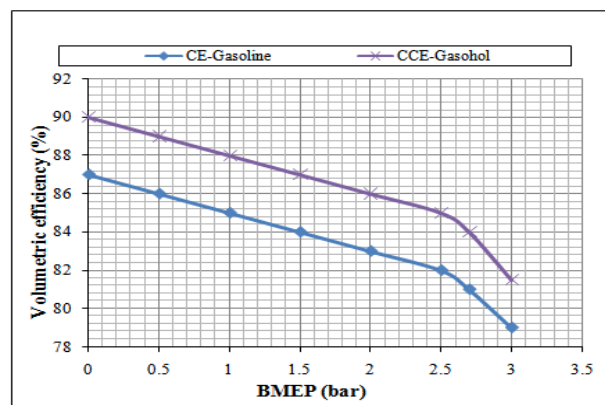


CE- conventional engine: CCCC-Copper coated combustion chamber, BMEP-Brake mean effective pressure  
**Figure.6 Variation of volumetric efficiency with BMEP in different versions of the combustion chamber with test fuels at a compression ratio of 7.5:1 and speed of 3000 rpm**

### 3.2 Exhaust Emissions:

This section deals with variation of CO emissions and UBH emissions with BMEP. This also contains data of CO and UBHC emissions at different operating conditions of the catalytic converter.

Figure.7 shows the variation of CO emissions with BMEP in different versions of the engine with both pure gasoline and alcohol blended gasoline. CO emissions decreased with alcohol blended gasoline at all loads when compared to pure gasoline operation on copper coated combustion chamber and CE, as fuel-cracking reactions [13] were eliminated with alcohol. The combustion of methanol or ethanol produces more water vapor than free carbon atoms as methanol has lower C/H ratio of 0.25, while with ethanol 0.33, against 0.50 of gasoline. Methanol or ethanol has oxygen in its structure and hence its blends have lower stoichiometric air requirements compared to gasoline. Therefore more oxygen that is available for combustion with the blends of methanol and gasoline, leads to reduction of CO emissions. Methanol or ethanol dissociates in the combustion chamber of the engine forming hydrogen, which helps the fuel-air mixture to burn quickly and thus increases combustion velocity, which brings about complete combustion of carbon present in the fuel to CO<sub>2</sub> and also CO to CO<sub>2</sub> thus makes leaner mixture more combustible, causing reduction of CO emissions.

Copper coated combustion chamber reduced CO emissions in comparison with CE. Copper or its alloys acts as catalyst in combustion chamber, whereby facilitates effective combustion of fuel leading to formation of CO<sub>2</sub> instead of CO. Similar trends were observed with Reference [7] with pure gasoline operation on copper coated combustion chamber.

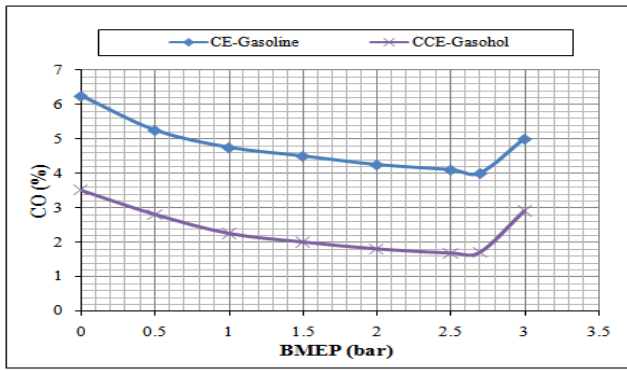

CE- conventional engine: CCCC-Copper coated combustion chamber, CO- Carbon monoxide emissions: BMEP-Brake mean effective pressure

**Figure.7. Variation of CO emissions with BMEP in different versions of the combustion chamber with pure gasoline and alcohol blended gasoline at a compression ratio of 7.5:1 and speed of 3000 rpm**


Table-1 shows the data of CO emissions with different test fuels with different configurations of the combustion chamber at different operating conditions of the catalytic converter with different catalysts. From the table, it can be observed that CO emissions decreased considerably with catalytic operation in set-B with alcohol blended gasoline and further decrease in CO is pronounced with air injection with the same fuel. The effective combustion of the alcohol blended gasoline itself decreased CO emissions in both configurations of the combustion chamber. CO emissions were observed to be higher with alcohol blended gasoline operation in comparison with pure gasoline operation in both versions of the combustion chamber at different operating conditions of the catalytic converter. This is due to the reason that C/H ratio of alcohol blended gasoline is lower in comparison with that of pure gasoline operation.

**TABLE-1  
DATA OF 'CO' EMISSIONS (%) WITH DIFFERENT TEST FUELS WITH DIFFERENT CONFIGURATIONS OF THE COMBUSTION CHAMBER AT DIFFERENT OPERATING CONDITIONS OF THE CATALYTIC CONVERTER AT A COMPRESSION RATIO OF 7.5:1 AND SPEED OF 3000 RPM.**

Set	Gasoline (CE)	Gasohol(CCE)
Set-A	5	2.6
Set-B	3	1.6
Set-C	2.0	1.1

**Set-A- Without catalytic converter and without air injection, Set-B: With catalyst and without air injection, Set-C: With catalyst and with air injection**

Figure.8 shows the variation of un-burnt hydro carbon emissions (UBHC) with BMEP in different versions of the combustion chamber with both test fuels. UBHC emissions followed the same trend as CO emissions in copper coated combustion chamber and CE with both test fuels, due to increase of flame speed with catalytic activity and reduction of quenching effect with copper coated combustion chamber.

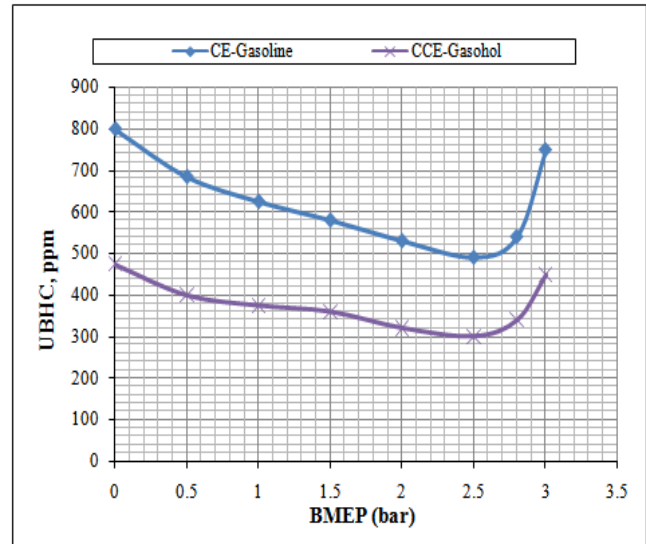

CE- conventional engine: CCCC-Copper coated combustion chamber, UBHC- Un-burnt hydro carbons: BMEP-Brake mean effective pressure

**Figure. 8 Variation of UBHC emissions with BMEP in different versions of the combustion chamber with pure gasoline and alcohol blended gasoline at a compression ratio of 7.5:1 and speed of 3000 rpm**

Table-2 shows the data of UBHC emissions with different test fuels with different configurations of the combustion chamber at different operating conditions of the catalytic converter with sponge iron. The trends observed with UBHC emissions are similar to those of CO emissions in both versions of the engine with both test fuels. From Table, it is observed that catalytic converter reduced UBHC emissions considerably with both versions of the combustion chamber and air injection into catalytic converter further reduced pollutants. In presence of catalyst, pollutants further oxidised to give less harmful emissions like CO<sub>2</sub>. Similar trends are observed with Reference [7] with pure gasoline operation on CCE.

**TABLE-2  
DATA OF 'UBHC' EMISSIONS (ppm) WITH DIFFERENT TEST FUELS WITH DIFFERENT CONFIGURATIONS OF THE COMBUSTION CHAMBER AT DIFFERENT OPERATING CONDITIONS OF THE CATALYTIC CONVERTER AT A COMPRESSION RATIO OF 7.5:1 AND SPEED OF 3000 RPM.**

Set	Gasoline (CE)	Gasohol(CCE)
Set-A	750	435
Set-B	450	260
Set-C	300	175

Set-A- Without catalytic converter and without air injection, Set-B: With catalyst and without air injection, Set-C: With catalyst and with air injection

3.2 Combustion characteristics

Figure.7(a) presents bar charts showing the variation of peak pressure with test fuels with different versions of the combustion chamber. Peak pressures were observed to be higher with alcohol blended gasoline in comparison with pure gasoline in both versions of the combustion chamber. Assuming all the fuel enter the engine completely evaporated, the fuel giving largest number of moles of product per mole of reactant should produce the greatest pressure in the cylinder after the combustion, all other factors being equal (which incidentally are not) The greater pressure taken alone would results in an increase in engine power. But an engine may not ingest its mixture with the fuel already evaporated. Under such conditions the number of moles of products should be examined on the basis of number of moles of air inducted since fuel occupies very little volume. Alcohol blended gasoline produced more number of moles of products on dry and wet basis.

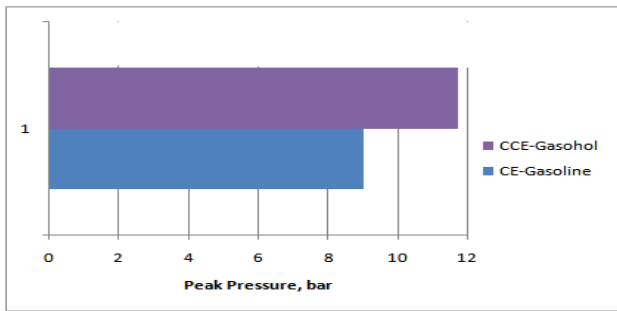


Figure.7 (a) Variation of PP for test fuels for different configurations of the engine

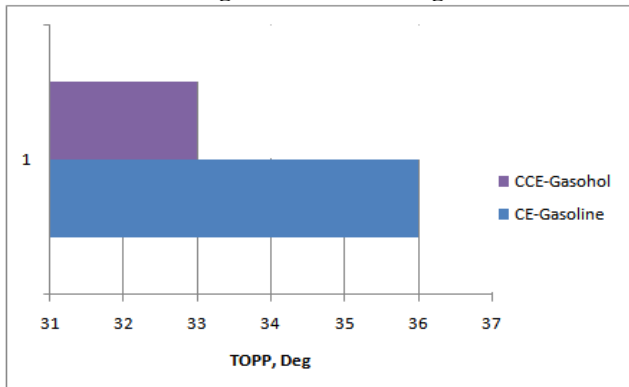


Figure.7 (b) Variation of TOPP for test fuels for different configurations of the engine

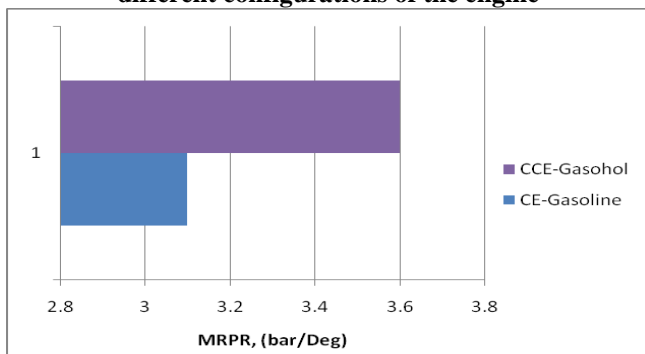


Figure.7 (c) Variation of MRPR for test fuels for different configurations of the engine

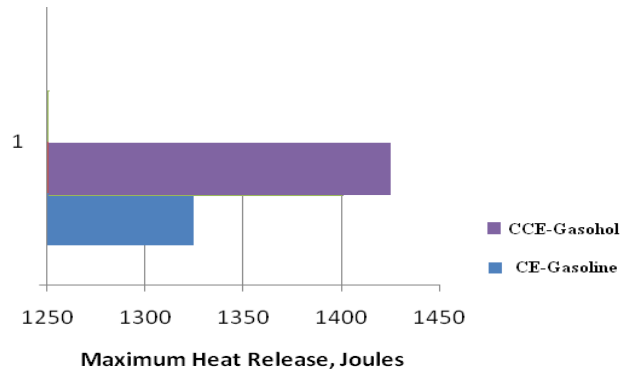


Figure.7 (d) Variation of maximum heat release for test fuels for different configurations of the engine

Figure.7- Variation of combustion characteristics for test fuels for different configurations of the combustion chamber.

Figure.7 (b) presents the bar charts showing the variation of time of occurrence of peak pressure (TOPP) in both versions of the combustion chamber with test fuels. TOPP was found to be lower (nearer to TDC) with CCE with alcohol blended gasoline compared with CE with pure gasoline, which confirms that performance was improved with efficient combustion with CCE. This is because CE exhibited higher temperatures of combustion chamber walls leading to continuation of combustion, giving peak pressures away from TDC. However, this phenomenon is nullified with CCE with alcohol blended gasoline because of reduced temperature of combustion chamber walls thus bringing the peak pressures closure to TDC.

CE with gasoline operation exhibited pressure on the piston by the time the piston already started executing downward motion from TDC to BDC leading to decrease PP and increase TOPP. Copper coated combustion chamber with alcohol blended gasoline operation improved combustion due to catalytic activity, PP was observed to be higher than CE with same test fuel. Higher PP and lower TOPP confirmed that performance of the copper coated combustion chamber with alcohol blended gasoline operation improved causing efficient energy utilization on the piston.

Alcohol addition improves the combustion process, reduces the crevices flow energy, reduces the cylinder temperature, reduces the ignition delay, speeds up the flame front propagation, and reduces the duration of combustion.

The trend followed by MRPR was similar to that of PP as indicated in Figure.7(c). The increase in maximum heat release (calculated from heat release diagram obtained from software package) indicates (Figure.7(d)) that the combustion in the copper coated combustion chamber with alcohol blended gasoline was improved when compared with CE with gasoline due to the combustion of the relatively lean air-fuel mixtures, which shows that combustion was efficient with CCE with gasohol.

#### IV. CONCLUSIONS

1. Thermal efficiency increased by 32% with gasohol operation compared to gasoline operation..
2. Exhaust gas temperature decreased by 30%, gasohol operation compared to gasoline operation..
3. Volumetric efficiencies increased by 4% with gasohol operation compared to gasoline operation.
4. CO and UBHC emissions at full load operation decreased by 17 and 20% with CCE when compared with CE with both test fuels.
5. Set-B operation decreased CO and UBHC emissions by 40%, while Set-C operation decreased these emissions by 60% with test fuels when compared to Set-A operation.
6. Peak pressure increased by 11% with gasoline operation, while with alcohol blended gasoline it increased by 10%.
7. Both MRPR and TOPP were compatible
8. Maximum heat release rate increased by 2% with gasoline operation, while with alcohol blended asoline, it increased by 2%.

#### 4.1 Research Findings and Future Scope of Work

Investigations on control of exhaust emissions in two-stroke SI engine were systematically carried out. Spark plug timing can be varied to improve the performance further and reduce pollutants more effectively.

#### ACKNOWLEDGEMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for facilities provided. The financial assistance from Andhra Pradesh Council of Science and Technology (APCOST), Hyderabad, is greatly acknowledged.

#### REFERENCES

1. Fulekar M H, Chemical pollution – a threat to human life, *Indian J Env Prot*, 1, 2004 353-359.
2. *Engineering Chemistry*, edited by B.K. Sharma [Pragathi Prakashan (P) Ltd, Meerut] 2004, 150-160.
3. *Environmental Pollution Analysis*, edited by S.M Khopkar [New Age International (P) Ltd, Publishers, New Delhi] 2005, 180-190.
4. Ghose M K, Paul R and Benerjee S K, Assessment of the impact of vehicle pollution on urban air quality, *J Environ Sci &Engg* , 46, 2004, 33-40.
5. Usha Madhuri T, Srinivas T and Ramakrishna K, A study on automobile exhaust pollution with regard to carbon monoxide emissions, *Nature, Environ & Poll Tech*, 2,2003, 473-474.
6. Murthy, P.V.K., Narasimha Kumar, S., Murali Krishna, M.V.S., Seshagiri Rao, V.V.R. and Reddy, D.N., "Aldehyde emissions from two-stroke and four-stroke spark ignition engines with methanol blended gasoline with catalytic converter", *International Journal of Engineering Research and Technology*, ISSN: 0974-3154, Volume- 3, Number- 3, 2010, pp: 793–802.
7. Nedunchezian N & Dhandapani S , Experimental investigation of cyclic variation of combustion parameters in a catalytically activated two-stroke SI engine combustion chamber, *Engg Today*, 2,2000, 11-18.
8. Murali Krishna, M.V.S., Kishor, K., Murthy, P.V.K., Gupta, A.V.S.S.K.S. and Narasimha Kumar, S., "Performance evaluation of copper coated four stroke spark ignition engine with gasohol with catalytic converter", *International Journal of Engineering Studies*", ISSN: 0975- 6469 Volume-2, Number-4, 2010, 465-473.
9. Murali Krishna, M.V.S. and Kishor, K., "Control of pollutants from copper coated spark ignition engine with methanol blended gasoline", *Indian Journal of Environmental Projection*. 25(8), 732-738, 2005.
10. Murali Krishna, M.V.S., Kishor, K., Prasad, P.R.K. and Swathy, G.V.V., "Parametric studies of pollutants from copper coated spark

11. Murali Krishna, M.V.S., Kishor, K. and Ramana Reddy, Ch. V., "Control of carbon monoxide emission in spark ignition engine with methanol blended gasoline and sponge iron catalyst", *Ecology, Environment &Conservation*. 13(4), 13:17, 2008.
12. Murali Krishna, M.V.S. and Kishor, K., "Investigations on catalytic coated spark ignition engine with methanol blended gasoline with catalytic converter", *Indian Journal (CSIR) of Scientific and Industrial Research*, Volume-67, July, 543-548,2008.
13. Kishor, K., Murali Krishna, M.V.S., Gupta, A.V.S.S.K.S., Narasimha Kumar, S. and Reddy, D.N., "Emissions from copper coated spark ignition engine with methanol blended gasoline with catalytic converter", *Indian Journal of Environmental Protection*, 30(3), 2010, 177-18
14. Ceviz, M.A. and Yu "ksel, F., "Effects of ethanol–unleaded gasoline blends on cyclic variability and emissions in a spark ignition engine", *Applied Thermal Engineering*, Volume- 25, 917–925, 2005.
15. Bahattin Celik, M., "Experimental determination of suitable ethanol–gasoline blend rate at high compression ratio for gasoline engine", *Applied Thermal Engineering*, Volume-28, 396–404, 2008.
16. Al-Baghdadi., "Measurement and prediction study of the effect of ethanol blending on the performance and pollutants emission of a four-stroke spark ignition engine", *Proceedings of the Institution of Mechanical Engineers*, Volume- 222, Number- 5, 859-873, 2008.